


ELEVATION VIEW
NEW OR EXISTING REMOVABLE SIGN PANEL FRAME
MOUNTING HOLE SPACING


NOTE
Sign panel mounting holes 13 mm ϕ maximum for 10 mm ϕ bolts.

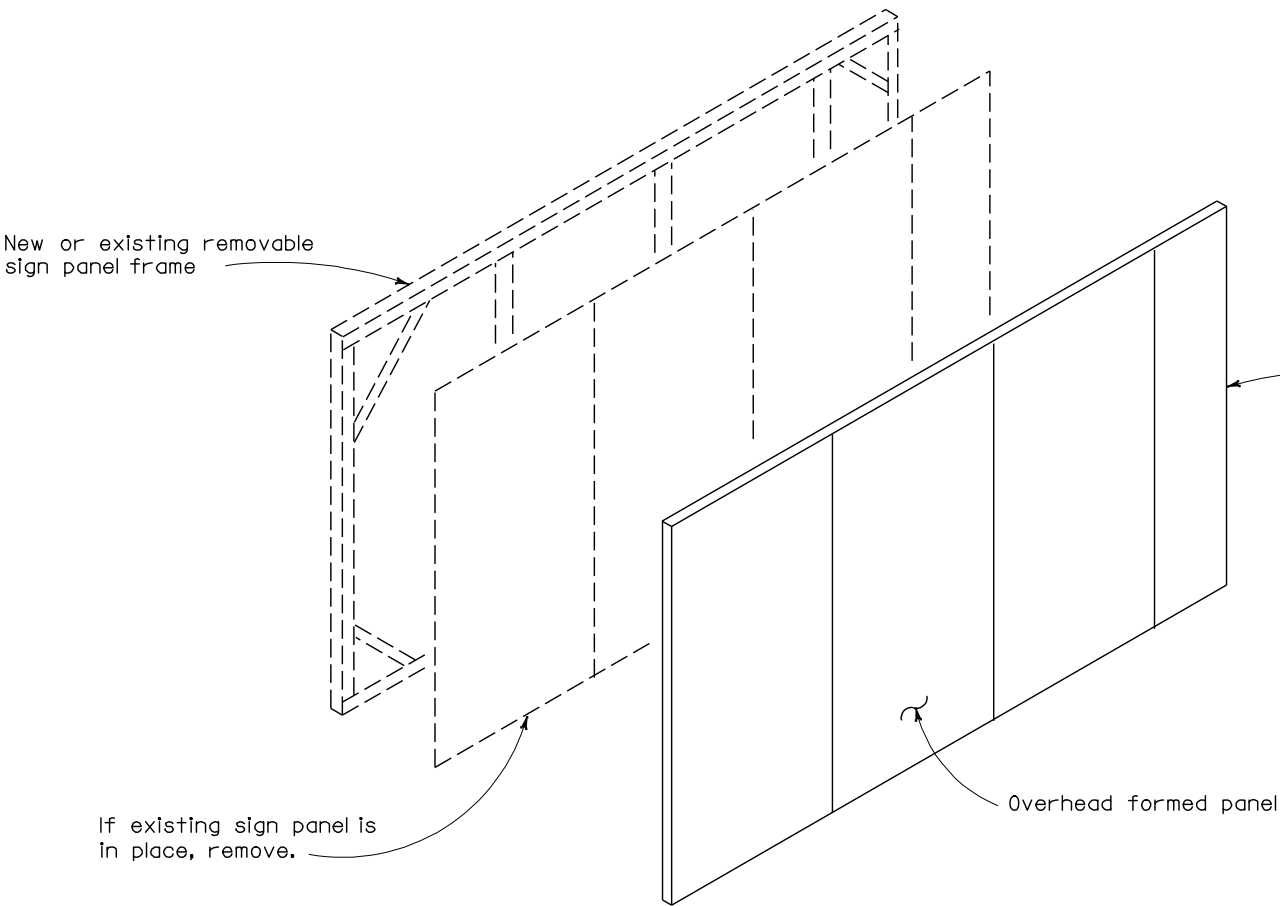

NOTE
The Contractor shall verify all dependent dimensions in the field before ordering or fabricating any material.

PANEL DEPTH (mm)	A	MOUNTING BOLT SPACING					
		1 Space	2 Space (mm)		3 Space (mm)		
		C1	C2	D2	C3	D3	C3
1270	32	1207					
1524			730	730			
1778			476	1238			
2032			984	984			
2286			984	1238			
2540			1238	1238			
2794					984	762	984
3048	32				1238	508	1238

TABLE 1

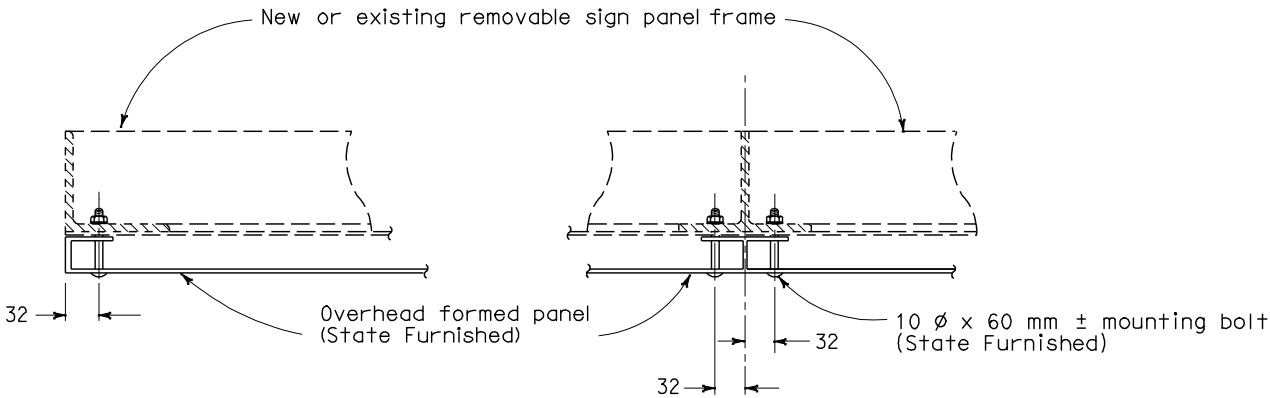

CORNER DETAIL

PANEL CONNECTION

SECTION A-A

NOTES
When constructing a new frame:
(1) Refer to Revised Standard Plan Sheet RSP S8A for structural details,
(2) Sign panels shall be considered as a template for drilling holes for mounting bolts.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**OVERHEAD SIGNS
REMOVABLE SIGN PANEL FRAMES
MOUNTING DETAILS**

NO SCALE
ALL DIMENSIONS ARE IN
MILLIMETERS UNLESS OTHERWISE SHOWN

RSP S8B DATED DECEMBER 30, 2004 SUPERSEDES STANDARD PLAN S8B
DATED JULY 1, 1999-PAGE 226 OF THE STANDARD PLANS BOOK DATED JULY 1999.

REVISED STANDARD PLAN RSP S8B



DIST	COUNTY	ROUTE	KILOMETER TOTAL PROJECT	POST SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER
December 30, 2004
PLANS APPROVAL DATE
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.
To get to the Caltrans web site, go to: <http://www.dot.ca.gov>

Tillat Sattar
No. C42892
Exp. 3-31-06
CIVIL
STATE OF CALIFORNIA

To accompany plans dated _____